

# TECHNISCHE DOKUMENTATION



KBS Gastrotechnik GmbH – Schoßbergstraße 26 – 65201 Wiesbaden

## Oriental Cooking - Teppanyaki Griddle

### Electric - Teppanyaki TP

#### TP 15/E Portable



Due to continuous technical development, the image shown may not represent the latest design of the unit.

#### DESCRIPTION

Electric Teppanyaki Griddle with uniform heating and accurate temperature control for superior hibachi-style cooking.

Three, individually controlled heating zones energized by Nayati SSS® die cast aluminium heating elements with a total of 14.3 kW connected load to ensure a stable and unfluctuating heating performance.

Griddles made of 20 mm thick, highly polished S355JR steel, which is designed to withstand the daily use of knives and spatulas. Mounted on a sturdy stainless steel frame construction with a height adjustable stainless steel legs. The removable top frame for the griddle and the large capacity grease container guarantees an excellent hygienic level.

#### OTHER AVAILABLE MODELS

- TP 15/E
- TP 12/E
- TP 12/E Portable

#### MAIN FEATURES

- High-efficient Nayati SSS® die cast aluminium heating elements with a total connected load of 14.3 kW.
- Thermostats with control knobs and function indication lights.
- Griddle plate, made of 20 mm polished S355 JR steel.
- Rectangular drain with a large stainless steel container to collect grease/ food debris.
- Hand-/condiment rail which accepts various numbers of GN 1/9 containers.
- CE certified unit.

#### CONSTRUCTION

Sturdy frame made of stainless steel AISI 430.

- Stainless steel top panel (1.5 mm), AISI 304 with orbital surface pattern.
- Front and side panels (1.0 mm) made of stainless steel AISI 304 with hairline surface pattern.
- Back panel (1.0 mm) made of stainless steel AISI 304 with hairline surface pattern.
- Height adjustable stainless steel legs.
- Types of installations: table-top.
- Frame, top and panels, all made of high-grade stainless steel.


#### INCLUDED ACCESSORIES

- N/A


#### OPTIONAL ACCESSORIES

- N/A


**FRONT**

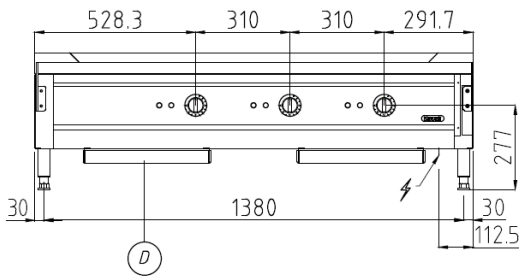

**TOP**

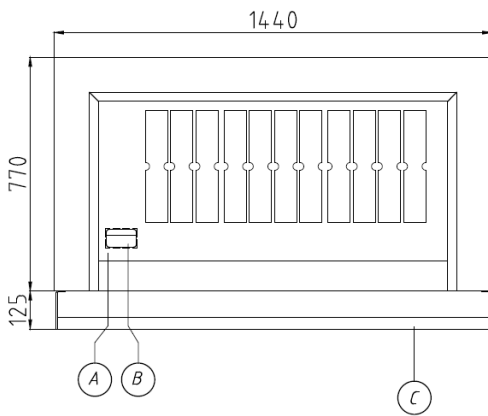

**SIDE**

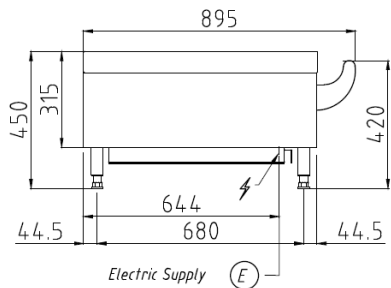

\*Overall dimension in mm

**TECHNICAL DATA**

**External Dimensions**

Width : 1440 mm  
 Depth : 770/895 mm  
 Height : 450 mm

**Cooking Surface**

Cooking zones : 1200 x 550 mm  
 Heating zones : 3  
 Control type : Modulating temperature control

**Electrical Supply Data**

Total connected load : 14.3 kW  
 Voltage : 400V, 3NPE AC /50-60Hz  
 Recommended fuse : 25 A (slow)

**Connections**

Water : N/A  
 Drain : N/A

**Heat & Steam Emissions**

Direct heat emission : 4.72 kW  
 Latent heat emission : 5.72 kW  
 Steam emission : 8.41 kg/h

**PACKAGING DATA**

Width : 1470 mm  
 Depth : 925 mm  
 Height : 570 mm  
 Volume : 0.78 m<sup>3</sup>

**WEIGHT**

Net Weight : 203 kg  
 Gross Weight : 252 kg