

Lever opening angle:  
0-25°

Elbow operated lever

297 (MIN)

Swivel nozzle

350mm  
Stainless steel  
flexible supply  
hoses  
with female  
G1/2" inlet

355 (MAX)

236

25°

160


49

46  
Maximum  
Thickness

378

280

110°

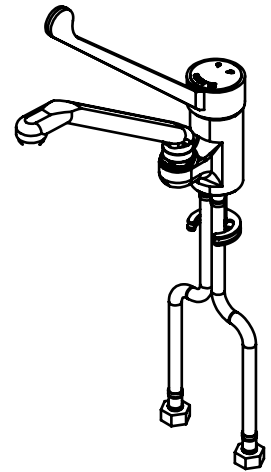

Rough-In Requirement:  
35mm Mounting Hole

**PRODUCT COMPLIANCE:**

ROHS 2011/65/UE;  
REACH 1907/2006;  
DVGW Hygiene

TITLE / DESCRIZIONE

Chrome plated brass single hole. Deck mount mixing faucet with 180mm swivel nozzle; 220mm-long sanitary lever; high flow ceramic cartridge; G1/2" female inlets.

DRN / DIS

A.E.

CHD / VER

APPR

SCALE /  
SCALA

1:5

DATE /  
DATA

28/12/22

SHEET / PAG  
1 of 2

NUMBER / CODICE DIS.

MODEL / PRODOTTO

1S.2990.45.91

A4V

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato