


EXPLOSIONSZEICHNUNG



KBS Gastrotechnik GmbH – Schoßbergstraße 26 – 65201 Wiesbaden

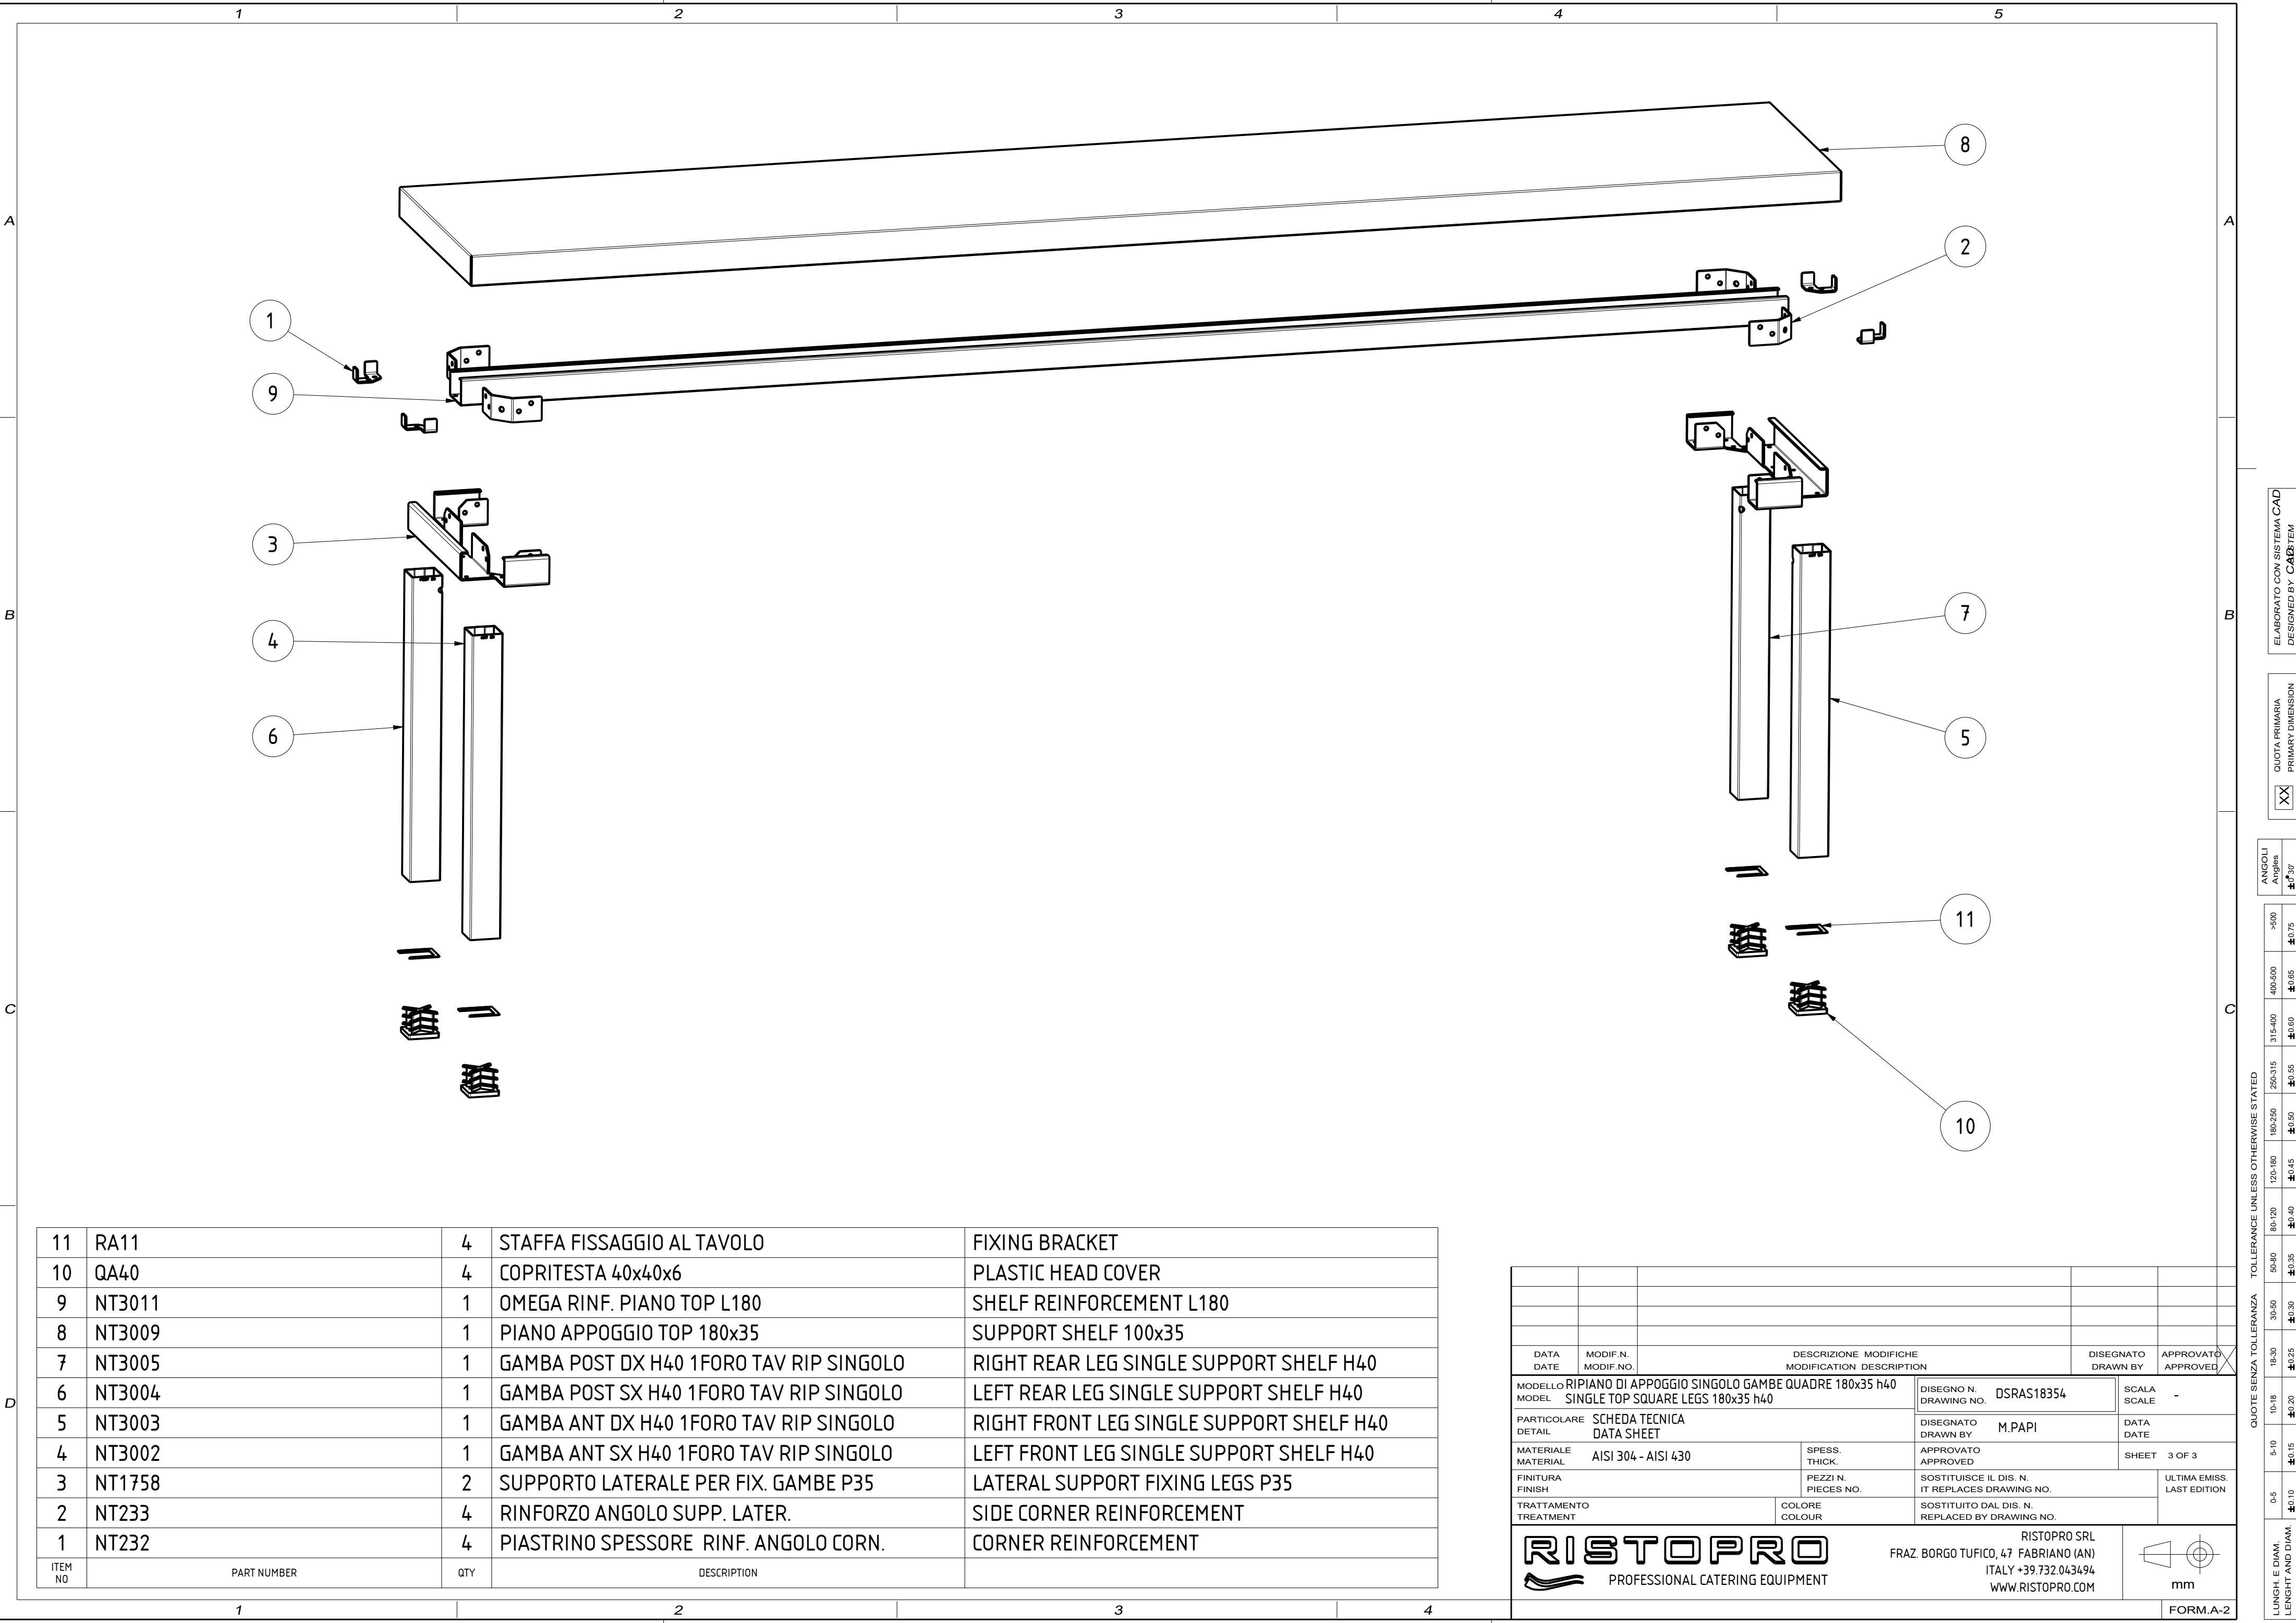

11	RA11	4	STAFFA FISSAGGIO AL TAVOLO	FIXING BRACKET
10	QA40	4	COPRITESTA 40x40x6	PLASTIC HEAD COVER
9	NT3011	1	OMEGA RINF. PIANO TOP L180	SHELF REINFORCEMENT L180
8	NT3009	1	PIANO APPOGGIO TOP 180x35	SUPPORT SHELF 100x35
7	NT3005	1	GAMBA POST DX H40 1FORO TAV RIP SINGOLO	RIGHT REAR LEG SINGLE SUPPORT SHELF H40
6	NT3004	1	GAMBA POST SX H40 1FORO TAV RIP SINGOLO	LEFT REAR LEG SINGLE SUPPORT SHELF H40
5	NT3003	1	GAMBA ANT DX H40 1FORO TAV RIP SINGOLO	RIGHT FRONT LEG SINGLE SUPPORT SHELF H40
4	NT3002	1	GAMBA ANT SX H40 1FORO TAV RIP SINGOLO	LEFT FRONT LEG SINGLE SUPPORT SHELF H40
3	NT1758	2	SUPPORTO LATERALE PER FIX. GAMBE P35	LATERAL SUPPORT FIXING LEGS P35
2	NT233	4	RINFORZO ANGOLO SUPP. LATER.	SIDE CORNER REINFORCEMENT
1	NT232	4	PIASTRINO SPESSORE RINF. ANGOLO CORN.	CORNER REINFORCEMENT
ITEM NO	PART NUMBER	QTY	DESCRIPTION	

DATA DATE		MODIF.N. MODIF.NO.		DESCRIZIONE MODIFICHE MODIFICATION DESCRIPTION		DISEGNATO DRAWN BY		APPROVATO APPROVED	
MODELLO MODEL				RIPIANO DI APPOGGIO SINGOLO GAMBE QUADRE 180x35 h40 SINGLE TOP SQUARE LEGS 180x35 h40				DISEGNO N. DRAWING NO.	
PARTICOLARE DETAIL				SCHEDA TECNICA DATA SHEET				DISEGNATO DRAWN BY	
MATERIALE MATERIAL				AIS1 304 - AISI 430		SPESS. THICK.		APPROVATO APPROVED	
FINITURA FINISH						PEZZI N. PIECES NO.		SOSTITUISCE IL DIS. N. IT REPLACES DRAWING NO.	
TRATTAMENTO TREATMENT				COLORE COLOUR		SOSTITUITO DAL DIS. N. REPLACED BY DRAWING NO.			
RISTOPRO PROFESSIONAL CATERING EQUIPMENT						RISTOPRO SRL FRAZ. BORGO TUFICO, 47 FABRIANO (AN) ITALY +39.732.043494 WWW.RISTOPRO.COM			
						mm			

ELABORATO CON SISTEMA CAD
DESIGNED BY CAD/STEM


QUOTA PRIMARIA
PRIMARY DIMENSION
XX

ANGOLI
Angles
±0°30'

>500
±0,75
400-500
±0,65
315-400
±0,60
250-315
±0,55
180-250
±0,50
120-180
±0,45
80-120
±0,40
50-80
±0,35
30-50
±0,30
15-30
±0,25

TOLLERANCE UNLESS OTHERWISE STATED
QUOTE SENZA TOLLERANZA

LUNGH. E DIAM.
LENGTH AND DIAM.
±0,10
0-5
±0,15
5-10
±0,20
10-18
±0,25
18-30
±0,30
30-50
±0,35
50-80
±0,40
80-120
±0,45
120-180
±0,50
180-250
±0,55
250-315
±0,60
315-400
±0,65
400-500
±0,75
>500
±0,75



FORM.A-2