


EXPLOSIONSZEICHNUNG



KBS Gastrotechnik GmbH – Schoßbergstraße 26 – 65201 Wiesbaden

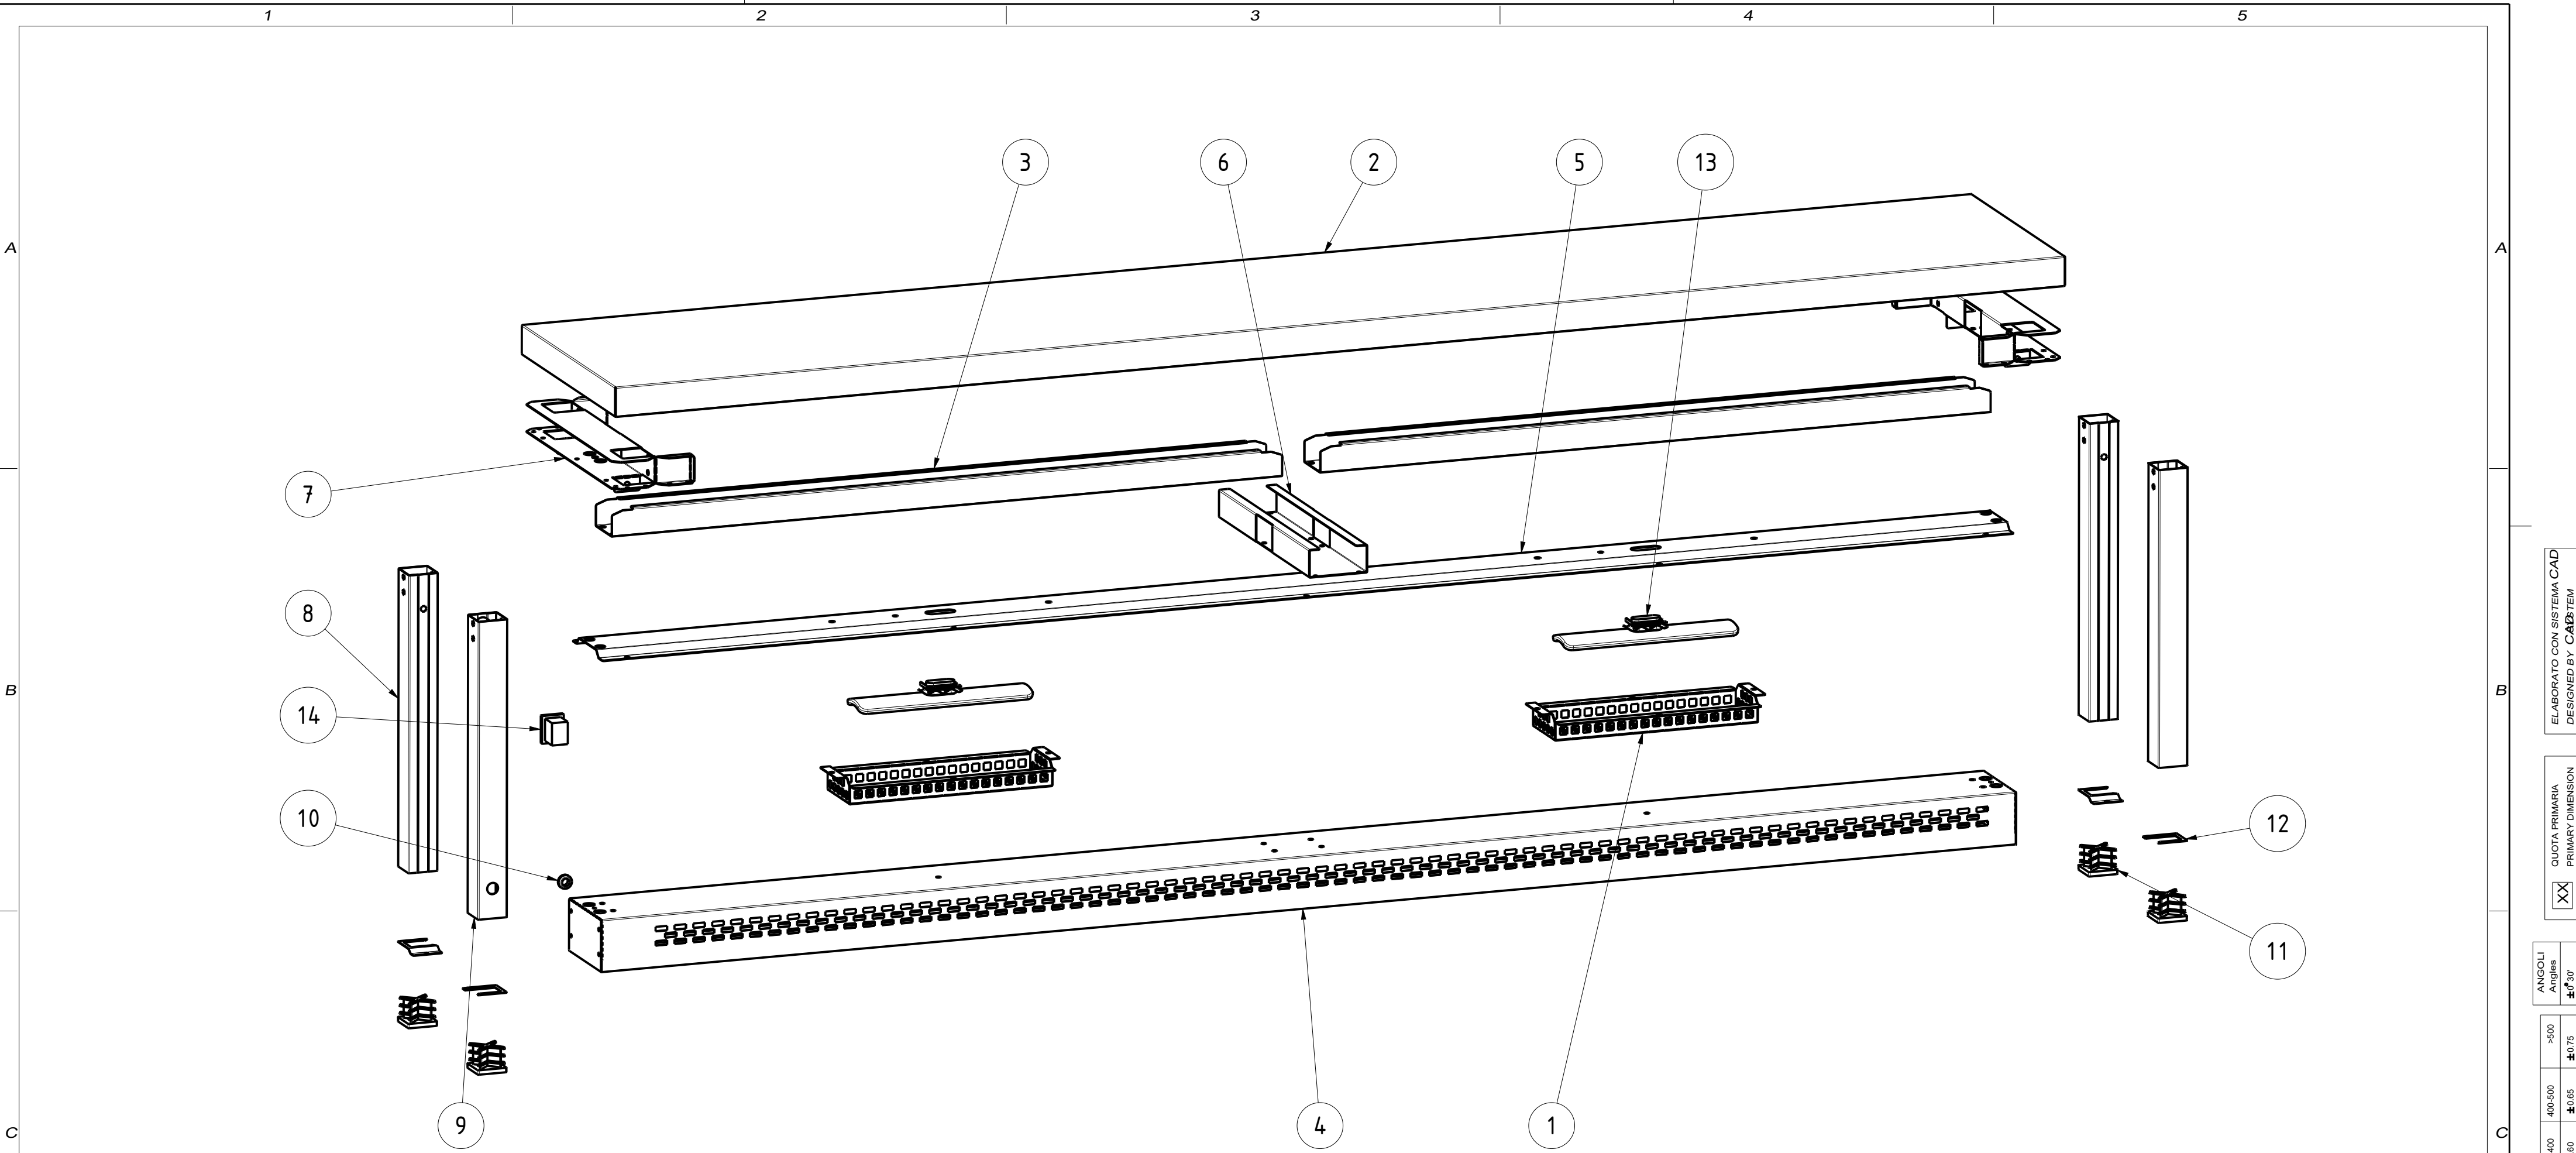

14	TASTO_ON_OFF_SCALDAVIVANDE	1	TASTO_ON_OFF	ON/OFF BUTTON
13	RESISTENZA	2	RESISTENZA	RESISTENCE
12	RA11	4	STAFFA FISSAGGIO AL TAVOLO	FIXING BRACKET
11	QA40	4	COPRITESTA 40x40x6	PLASTIC HEAD COVER
10	PASSACAVO_9_5	1	PASSACAVO 9-5	FAIRLEAD 9-5
9	NT14162	1	GAMBA QUADRA H40 PASSACAVO SCALDAVIVANDE	FAIRLEAD SQUARE LEG H40
8	NT14161	3	GAMBA QUADRA H40 PER SCALDAVIVANDE	SQUARE LEG H40
7	NT3321	2	SUPP.GAMBE QUADRE INFER.SCALDAVIVANDE P35	LOWER SQUARE LEGS SUPPORT P35
6	NT1636	1	RINFORZO CENTRALE SCALDAVIVANDE P35	---
5	NT1622	1	200 2R	INTERNAL RESISTANCE SUPPORT L120
4	NT1621	1	SUPP. RESISTENZA ESTERNO SCALDAVIVANDE L200	SUPPORT FOR EXTERNAL HEATING WARMER L200
3	NT1620	2	200_INFERIORE	UPPER REINFORCEMENT L120
2	NT1619	1	RIPIANO SUPERIORE SCALDAVIVANDE 200x35	UPPER SHELF 200x35
1	NT774	2	COPERTURA RESISTENZA	RESISTENCE COVER
ITEM NO	PART NUMBER	QTY	DESCRIPTION	

DATA DATE	MODIF.N. MODIF.NO.	DESCRIZIONE MODIFICHE MODIFICATION DESCRIPTION	DISEGNATO DRAWN BY	APPROVATO APPROVED
MODELLO MODEL		RIPIANO DI APPOGGIO SING. RISC. GAMBE QUAD. 200x35 h40 SINGLE TOP WITH HEATING SQUARE LEGS 200x35 h40	DISEGNO N. DRAWING NO. DSRASR20354	SCALA SCALE -
PARTICOLARE DETAIL		SCHEDA TECNICA DATA SHEET	DISEGNATO DRAWN BY M.PAPI	DATA DATE
MATERIALE MATERIAL		AISI 304 - AISI 430	SPESS. THICK.	APPROVATO APPROVED
FINITURA FINISH			PEZZI N. PIECES NO.	SOSTITUISCE IL DIS. N. IT REPLACES DRAWING NO.
TRATTAMENTO TREATMENT			COLORE COLOUR	SOSTITUITO DAL DIS. N. REPLACED BY DRAWING NO.
			ULTIMA EMISS. LAST EDITION	

RISTOPRO

PROFESSIONAL CATERING EQUIPMENT

RISTOPRO SRL

FRAZ. BORGO TUFICO, 47 FABRIANO (AN)

ITALY +39.732.043494

WWW.RISTOPRO.COM

mm

FORM.A-2

ELABORATO CON SISTEMA CAD
DESIGNED BY CAD2TEAM

QUOTA PRIMARIA
PRIMARY DIMENSION XX

ANGOLI
Angles 30° ±0.30°

TOLERANCE UNLESS OTHERWISE STATED

>500	±0.75
400-500	±0.65
315-400	±0.60
250-315	±0.55
180-250	±0.50
120-180	±0.45
80-120	±0.40
50-80	±0.35
30-50	±0.30
18-30	±0.25
10-18	±0.20
5-10	±0.15
0-5	±0.10

LUNGH. E DIAM.
LENGTH AND DIAM.